


# SOCIAL DISTANCING FLOOR GRAPHICS

## Application Instructions

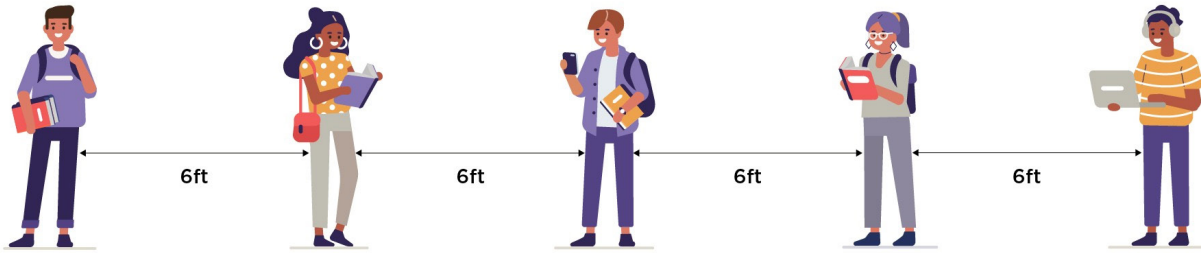

### Preliminary remarks

Social Distancing Floor Graphics consist of a film specifically developed for foot traffic with an antiskid overlamine. Social Distancing Floor graphics are suitable for application to most floor materials. Problems may only occur when applied to uneven, porous or painted floors treated with floor polish or cleaned with water additives or to PVC, carpets or marble floors.

### Cleaning of the floor

Each surface to which the graphics are to be applied need to be cleaned with a suitable solvent removing any grease before applying. We recommend the use of isopropyl alcohol (Isopropanol). Clean an area that is 6 to 8 inches (15 to 20 cm) larger than the graphic. Wipe the surface completely dry with a lint-free paper towel before the alcohol evaporates. The floor must be completely dry before applying the graphic.

### Application

These graphics are applied in a dry state. The graphics are positionable and do not require a premasking or prespacing tape. Remove the protective paper completely and apply the graphic by pressing it strongly against the floor. Apply big overlapping sweeps with a vinyl squeegee (or similar alternative) across the surface of the overlamine to avoid the formation of gas bubbles between the graphic and the floor. The application is not finished until the graphic is re-squeegeed at the edges and the corners. This ensures a good edge seal.

We recommend an overlap of the graphic at the edges of at least 2 cm. Check the edges and press them again forcefully against the floor after you have completed the application.

### Please note:

The edges of the graphic should not be applied to protruding surfaces such as stair nosings or crevices. The edges of the graphics must never end up in a tile joint or crevice between hardwood joints. Do not step on the floor for at least 30 minutes in order to ensure sufficient adhesion.

### Cleaning after application

Wait at least 24 hours before cleaning the floor after application.

### Removal of the film

Remove the graphics at a 90° angle starting from one corner.